

LED Star T5-RetroFit AC

RL-T5 49 HO 840/G5 AC

Radium

Product Datasheet Date: 30.05.2026



26

4000

4000K

60 000h



General Data

Code Radium	44026833
Désignation	RL-T5 49 HO 840/G5 AC
EAN 10 (unité)	4008597268335
Unité de transport (pièces)	25
EAN 40 (carton)	4008597468339
Poids brut du carton en kg	8.4
Longueur box in m	1.515
Largeur du carton en m	0.12
Hauteur du carton en m	0.125
Product weight	150 g
Product status	● Actif

Electric Parameters

Wattage	26.0 W
Nominal power	26.0 W
Weighted energy consumption in 1000 hours	26 kWh
Lamp power	26.0 W
Power factor	> 0.9

Electric Parameters

Nominal voltage	220-240 V
Mains Voltage	220 - 240 V
Voltage type	AC
Nominal current	115 mA
Nominal current (mA)	263 mA
Inrush current	14.2 A
max. no. of lamps at 10A-B10 automatic fuse	2
max. no. of lamps at 16A-B16 automatic fuse	4
dimnable	Non

Light Application Parameters

Luminous flux	4000 lm
Rated lamp luminous flux	4000 lm
Luminous flux	4000 lm
Lumen-Output mark	HO
Beam angle	210 °
Efficacy / Luminous efficiency	154 lm/W
Total mains efficacy	154 lm/W
Color temperature	4000 K
Color coordinate X	0.380
Color coordinate Y	0.380
Color rendering index	≥ 80
Color rendering index nominal	83
Color Stability	≤ 6 sdc _m

Service Life

Average life	60000 h
T _c Temperature max.	75 °C
Mean service life	60000 h
Lifetime L70B50	60000 h
No. switching cycles	100000
Lamp survival factor at 6000h	≥ 0.90
Early failure rate at 1000h	≤ 5.0 %
Guarantee	5 years

Specification

Diameter	19 mm
Tube diameter	16 mm
Length	1449 mm
Length	1449 mm
Burning position	any
Shatterproof	Oui
Photobiological safety according to EN 62471	RG1
Lamp shape	Tube, double-ended
Base	G5
Colour	White

Notes on Operation

Degree of protection (IP)	IP20
Burning position	any
Mode of operation	230 V
Ambient temperatures	-20 ... +45 °C
Tc Temperature max.	75 °C
With movement sensor	Non

Information especially for EPREL

Lighting technology	LED
Directional or non-directional light	NDLS
Color tunable light source	Non
Type of color temperature	SINGLE_VALUE
Color rendering index R9	40
Color stability MacAdams EPREL	6
Displacement factor EPREL	0,9
Life factor EPREL	0,9
Lumen maintenance EPREL	0.7
Flicker	1.0
Stroboscopic effect	0.4
EPREL ID number	2428514

Miscellaneous

Similar products	43920261, 43720838
------------------	--------------------

Notes

T5 tubular LED lamp for exchange with fluorescent lamps, neutral white light, glass bulb, non-dim, base G5. Operation with 230V only.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Culot




G5
IEC/EN 60061-1
sheet 7004-52-5

Courbes spectrales


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin. Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

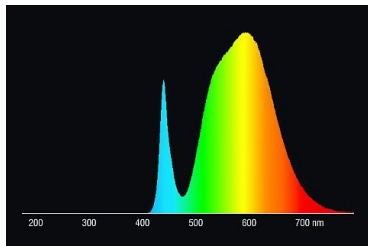

LED retrofit tube lamps for fluorescent lamps 4000K

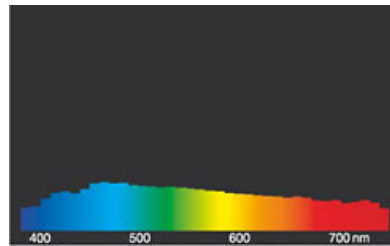

daylight(D 65)

Particularités



Notices explicatives générales

Please note the installation instructions when replacing fluorescent lamps with LED tubes. Some LED lamp types are only suitable for 1: 1 replacement at the respective burning position: with CCG by using the enclosed starter, with ECG with compatible control gear. Others can be operated directly on 230V (conversion of the luminaire), others again can 'do' CCG as well as 230V or all 3 variations. Neo tubes need an external LED driver (replacement of the control gear). LED Neo tubes are dimmable, all other LED tubes are not dimmable.

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

Consignes de sécurité

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

LED Star T5-RetroFit AC
RL-T5 49 HO 840/G5 AC

Radium

All technical data without guarantee.