

LED Star PAR38

RL-PAR38 100 11W/230/SP/827/E27

Radium

Product Datasheet Date: 18.05.2026



A+



1035



2700K



25 000h

General Data

| | |
|---------------------------|---|
| Article No. | 43219492 |
| Codice | RL-PAR38 100 827/WFL/E27 |
| Product EAN | 4008597194924 |
| Box quantity (pcs.) | 6 |
| EAN Box | 4008597494925 |
| Gross weight of box in kg | 2.897 |
| Length of box in m | 0.39 |
| Width of box in m | 0.27 |
| Height of box in m | 0.18 |
| Product weight | 198 g |
| Product status | ● Inattivo |

Electric Parameters

| | |
|---|-----------|
| Wattage | 11.0 W |
| Weighted energy consumption in 1000 hours | 11 kWh |
| Power factor | ≥ 0.7 |
| Nominal voltage | 220-240 V |
| Voltage type | AC |

LED Star PAR38

RL-PAR38 100 11W/230/SP/827/E27

Radium

Electric Parameters

| | |
|----------------------|-------|
| Nominal current (mA) | 60 mA |
| dimnable | No |

Light Application Parameters

| | |
|-----------------------------|------------|
| Rated lamp luminous flux | 1035 lm |
| Luminous flux in 90°-sector | 1035 lm |
| Luminous intensity | 4800 cd |
| Beam angle | 15 ° |
| Efficacy | 94.09 lm/W |
| Color temperature | 2700 K |
| Color rendering index | ≥ 80 |
| Color Stability | ≤ 6 sdcn |

Service Life

| | |
|-------------------------------|---------|
| Average life | 25000 h |
| Mean service life | 25000 h |
| No. switching cycles | 100000 |
| Lamp survival factor at 6000h | ≥ 0.90 |
| Early failure rate at 1000h | ≤ 5.0 % |

Specification

| | |
|--|--|
| Energylabel notice | old label, no EPREL registration, no EU data sheet |
| Energylabel (E -> A++) | A+ |
| Diameter | 122 mm |
| Length | 133 mm |
| Length | 133 mm |
| Burning position | any |
| Mercury content | 0.0 mg |
| Photobiological safety according to EN 62471 | RG0 |
| Lamp shape | Reflector |
| Base | E27 |
| Colour | White |

Notes on Operation

| | |
|---------------------------|--------------|
| Degree of protection (IP) | IP20 |
| Burning position | any |
| Ambient temperatures | -20...+40 °C |

LED Star PAR38

RL-PAR38 100 11W/230/SP/827/E27

Radium

Notes on Operation

With movement sensor No

Information especially for EPREL

| | |
|--------------------------------------|--|
| Energylabel notice | old label, no EPREL registration, no EU data sheet |
| Lighting technology | LED |
| Mains/Non mains connectable | MLS |
| Directional or non-directional light | DLS |
| Color tunable light source | No |
| Type of color temperature | SINGLE_VALUE |
| Life factor EPREL | 0.9 |
| Lumen maintenance EPREL | 0.93 |
| Flicker | 1.0 |

Notes

PAR38-LED, remplacement avec lampes halogènes, lumière blanc chaud, corps en verre, gradable, culot E27. Lumière LED ne contient UV ou IR.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Base




E27
IEC/EN 60061-1
sheet 7004-21-9

Spectrum


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin. Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

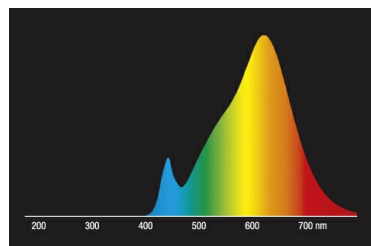

LED Retrofit reflector lamps MR16 / PAR 16 2700K

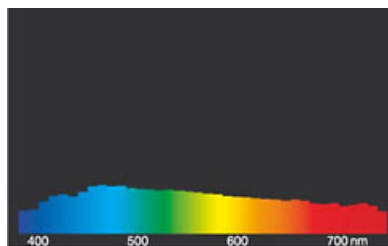

daylight(D 65)

Special features

LED Star PAR38

RL-PAR38 100 11W/230V/SP/827/E27

Radium



General notes

For LED replacement of halogen and incandescent lamps, we recommend direct replacement (1: 1) at the respective burning position. For new systems, the number of lamps in the circuit operated at control gear such as transformers or dimmers can be obtained from corresponding compatibility lists (if available). If there is no specification for the type of device or lamp required, for safety reasons, the replacement power shall be assumed as that of the original halogen type (eg "RL-MR16 35" -> 35W, independent of the real power consumption).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefs) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

Safety instructions

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.