
LED tubular lamp
RL-T40 75 10W/230/840/F/E27 RO

Radium

Product Datasheet Date: 01.11.2026



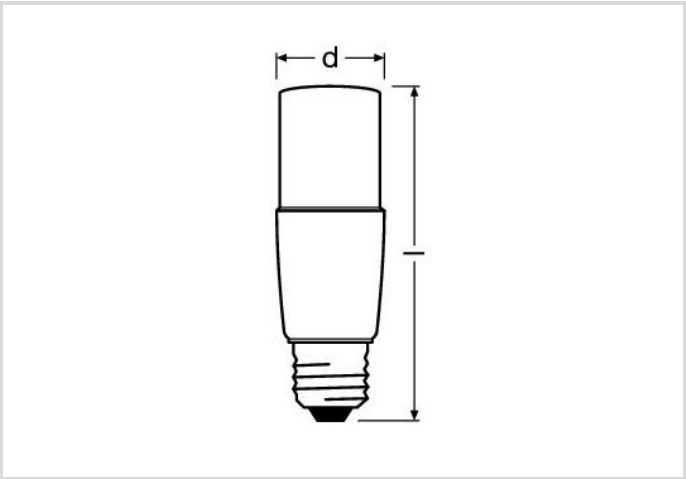

A+	F	10	1050	4000K	15 000h

General Data

Article No.	43618003
Codice	RL-T40 75 840/F/E27 RO
Product EAN	4058075292697
Box quantitiy (pcs.)	10
EAN Box	4058075292703
Gross weight of box in kg	0.445
Length of box in m	0.22
Width of box in m	0.09
Height of box in m	0.13
Product weight	30 g
Product status	Inattivo

Electric Parameters

Wattage	10.0 W
Nominal power	10.0 W
Weighted energy consumption in 1000 hours	10 kWh
Lamp power	10.0-10.0 W
Power factor	>0,5

LED tubular lamp
RL-T40 75 10W/230/840/F/E27 RO

Radium

Electric Parameters

Power factor	0,5
Nominal voltage	220-240 V
Mains Voltage	220 - 240 V
Voltage type	AC
Nominal current (mA)	74 mA
max. no. of lamps at 10A-B10 automatic fuse	135
max. no. of lamps at 16A-B16 automatic fuse	216
dimmable	No

Light Application Parameters

Luminous flux	1050 lm
Rated lamp luminous flux	1050 lm
Luminous flux in 90°-sector	1050 lm lm
Luminous flux in 120°-sector	1050 lm lm
Beam angle	200 °
Efficacy / Luminous efficiency	105 lm/W
Total mains efficacy	105 lm/W
Color temperature	4000 K
Color rendering index	≥ 80
Color rendering index nominal	80-89
Color Stability	≤ 6 sdcm

Service Life

Average life	15000 h
Tc Temperature max.	91.7 °C
Mean service life	15000 h
No. switching cycles	[100000]
Early failure rate at 1000h	≤ 5.0 %
Guarantee	3 years

Specification

Energylabel notice	old label, no EPREL registration, no EU data sheet
Energylabel (G -> A)	F
Energylabel (E -> A++)	A+
Diameter	40,4 mm
Length max.	114 mm mm

LED tubular lamp
RL-T40 75 10W/230/840/F/E27 RO

Radium

Specification

Length	114 mm
Burning position	any
Mercury content	0.0 mg
Lamp shape	Tube, single-ended
Base	E27
Colour	White
Housing colour	White

Notes on Operation

IP Class (Room/Ceiling)	IP20
Burning position	any
Ambient temperatures	-20…+40 °C
Tc Temperature max.	91.7 °C
With movement sensor	No

Information especially for EPREL

Energylabel notice	old label, no EPREL registration, no EU data sheet
Lighting technology	LED
Color tunable light source	No
Life factor EPREL	0.9
Lumen maintenance EPREL	0.93

Notes

LED tubular lamp, for exchange with halogen lamps. LED-light does not contain UV or IR radiation.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Base




E27
IEC/EN 60061-1
sheet 7004-21-9


Spectrum
As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.
The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.
White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin.

LED tubular lamp
RL-T40 75 10W/230/840/F/E27 RO

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

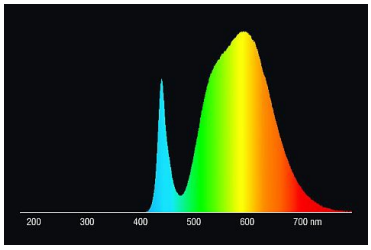


LED retrofit lamps 4000K

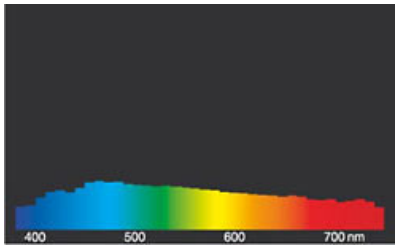

daylight(D 65)

Special features









General notes

For LED replacement of halogen and incandescent lamps, we recommend direct replacement (1: 1) at the respective burning position. For new systems, the number of lamps in the circuit operated at control gear such as transformers or dimmers can be obtained from corresponding compatibility lists (if available). If there is no specification for the type of device or lamp required, for safety reasons, the replacement power shall be assumed as taht of the original halogen type (eg "RL-MR16 35" -> 35W, independent of the real power consumption).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark
Subject to change without notice. Errors and omissions excepted.

Safety instructions

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.