

Halogen lamp double based

RJH-TS 120W/230/C/XE/R7S

Radium

Product Datasheet Date: 03.05.2026



G



120W



2 000h



Dimmable

General Data

Article No.	22315973
Codice	RJH-TS 120W/230/C/XE/R7S
Product EAN	4008597159732
Box quantity (pcs.)	20
EAN Box	4008597459733
Gross weight of box in kg	0.306
Length of box in m	0.139
Width of box in m	0.113
Height of box in m	0.07
Product weight	8 g
Product status	● Attivo

Electric Parameters

Wattage	120.0 W
Weighted energy consumption in 1000 hours	120 kWh
Lamp voltage	230-230 V
Mains voltage	230 V
Lamp's nominal current	0.522 A

Electric Parameters

Nominal current (mA)	522 mA
dimnable	Si

Light Application Parameters

Luminous flux	2245 lm
Rated lamp luminous flux	2245 lm
Efficacy	19 lm/W
Colour temperature	3000 K
Color coordinate X	0.437
Color coordinate Y	0.404
Color rendering index	100

Service Life

Average life	2000 h
No. switching cycles	10000

Specification

Energylabel notice	current label, with EPREL registration
Energylabel (G -> A)	G
Diameter	12 mm
Length	119.6 mm
Total length max.	119.6 mm
Length	119.6 mm
Contact distance I	114.2 mm
Burning position	any
Mercury content	0.0 mg
Lamp shape	Tube, double-ended
Model	Clear
Base	R7s

Notes on Operation

Burning position	any
------------------	-----

Information especially for EPREL

Energylabel notice	current label, with EPREL registration
Lighting technology	HL
Directional or non-directional light	NDLS

Halogen lamp double based
RJH-TS 120W/230/C/XE/R7S

Radium

Type of color temperature

SINGLE_VALUE

Information especially for EPREL

EPREL ID number

566084

Notes

Mains voltage halogen lamp clear, tubular shape, 230V mains, double ended, base R7s, dimmable steplessly

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Base




R7s
IEC/EN 60061-1
sheet 7004-92A-4

Spectrum

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament. The addition of halogens to the filling gas enhance the efficiency and prevents blackening. Further increase in efficiency can be achieved by adding Xenon and/or IRC-coating.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

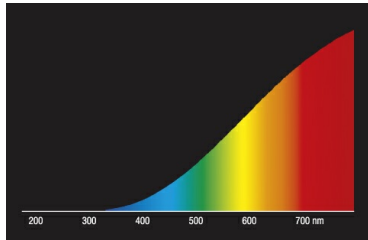

light of incandescent lamps



daylight(D 65)

Special features



General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

Halogen lamp double based

RJH-TS 120W/230/C/XE/R7S

Radium

All technical data without guarantee.