
# **Build-in sensor for aluminium profiles**

In-Profile TOUCHDIM Sensor 72W/12-24V



Product Datasheet Date: 19.10.2025

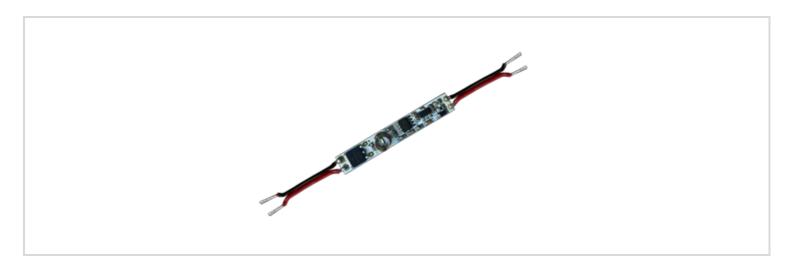

## **General Data**

Article No.	LMCA5064
Atticle No.	LIVICA3004
Code	IN-PROFILE TOUCHDIM SENSOR 72W/12-24V
Product EAN	4003556014954
Box quantitiy (pcs.)	30
EAN Box	4003556414952
Gross weight of box in kg	0.52
Length of box in m	0.195
Width of box in m	0.105
Height of box in m	0.135
Product weight	6 g
Product status	Active

## **Electric Parameters**

max. power at 24V	72.0 W
Voltage range	12 - 24 V
Number of cores	2

## **Specification**

Type of accessory/spare part	Movement sensor
Length	50 mm
Height	10 mm
Width	7.8 mm
Built-in width	7.8 mm
Colour	Multi-coloured

# **Build-in sensor for aluminium profiles**

In-Profile TOUCHDIM Sensor 72W/12-24V



### **Notes on Operation**

Ambient temperatures	-30 +55°C
Fitting aluminium profile	TRPA2501, TRPA2511, TRPA2521, TRPA2531, TRPA2551

#### **Miscellaneous**

Similar products	LMCA5065, LMCA5066, LMCA5067

#### **Notes**

Compact profile installation sensor for controlling 12-24V LED Strips, enables on/off and dimming by touching the profie, at 24V control of up to 72W

Please, refer to <a href="www.radium.de/recycling">www.radium.de/recycling</a> for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value. The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

#### Special features



#### General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.