



A



18000



2000K

## General Data

Article No.	34418917
Kod	RNP-E 210W/I/230/E40 RO
Product EAN	4050300015576
Box quantity (pcs.)	12
Gross weight of box in kg	3.26
Length of box in m	0.47
Width of box in m	0.37
Height of box in m	0.29
Product weight	185 g
Product status	● Nieaktywne

## Electric Parameters

Wattage	200.8 W
Lamp nominal wattage	210 W
Mains voltage	230 V
Lamp's nominal current	2.3 A
Nominal choke current	2.15 A
Compensation capacitor for 50Hz operation	18 $\mu$ F

## Electric Parameters

Running up current max.	125%
Fuse	Delay-action; min. double nominal current
dimnable	Nie

## Light Application Parameters

Luminous flux	18000 lm
Rated lamp luminous flux	18000 lm
Efficacy	89.64 lm/W
Total mains efficacy	87 lm/W
Colour temperature	2000 K
Color rendering index	25
Lumen maintenance at 2000h	0.91
Lumen maintenance at 4000h	0.90
Lumen maintenance at 6000h	0.88
Lumen maintenance at 8000h	0.85
Lumen maintenance at 12000h	0.80

## Service Life

Lamp survival factor at 2000h	0.99
Lamp survival factor at 4000h	0.98
Lamp survival factor at 6000h	0.98
Lamp survival factor at 8000h	0.93
Lamp survival factor at 12000h	0.88
Lamp survival factor at 16000h	0.84
Lamp survival factor at 20000h	0.80

## Specification

Energylabel notice	old label, no EPREL registration, no EU data sheet
Energylabel (E -> A++)	A
Diameter	91 mm
Length	227 mm
Total length max.	226 mm
Burning position	h180
Mercury content	19.9 mg
Lamp shape	Ellipsoid
Model	Opal

## Specification

Base	E40
------	-----

## Notes on Operation

Burning position	h180
------------------	------

## Information especially for EPREL

Energylabel notice	old label, no EPREL registration, no EU data sheet
--------------------	--

## Miscellaneous

EU-date of phase-out	13.04.2015
EU Directive	TIM

## Notes

Standard high pressure sodium lamp, elliptical bulb coated, base E27. Plug-In, 1:1 replacement for HPM lamp. Operation with ballast, no ignitor.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

### Base



E40  
IEC/EN 60061-1  
sheet 7004-24-6



### Spectrum

Natural daylight is a mixture of direct sunlight and the light of the sky. Therefore, its spectral composition changes permanently due to the changing time of day. The standardised light classification D65 corresponds to a daylight with a colour temperature of approximately 6500 K.

Every discharge lamp type has got an individual spectral power distribution according to its chemical filling. From this result important properties light colour or colour rendering. Sodium vapour lamps are very economic, due to the yellow light RNP lamps have got a high luminous efficiency but only modest colour rendering.

After the lamp start a high pressure sodium lamp needs about 6-10 minutes time to reach its full luminous flux.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

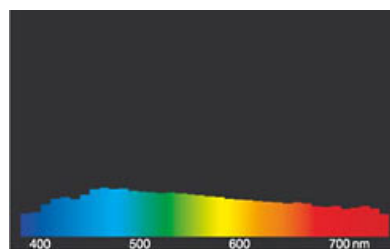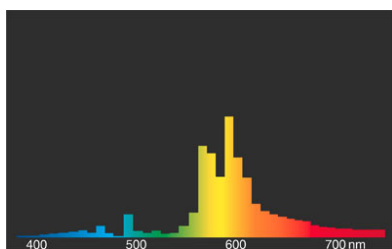

# High pressure sodium lamp plug-in


RNP-E 210W/I/230/E40

# Radium

RNP Standard/Super

daylight(D 65)

## Circuit diagram(s)

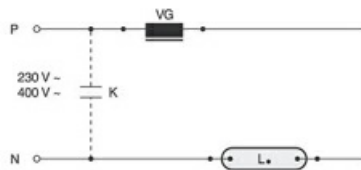

Standard circuit HID with internal ignitor

Key:

L. = lamp

VG = ballast electromagnetic (KVG/VVG)

P = phase

N = zero potential

K = p. f. correction capacitor

The required control gear (here ballast only) for the lamps operation is usually mounted in the suitable luminaire in an appropriate electric circuit. Changes of any kind are to be conducted by qualified and specialised staff, only. Thus, this circuit example is to be understood merely as a technical background information for interested users.

## Special features



## General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.