


Compact fluorescent lamp Ralux®/E

RX-S/E 11W/840/2G7

Radium

Product Datasheet Date: 04.04.2026

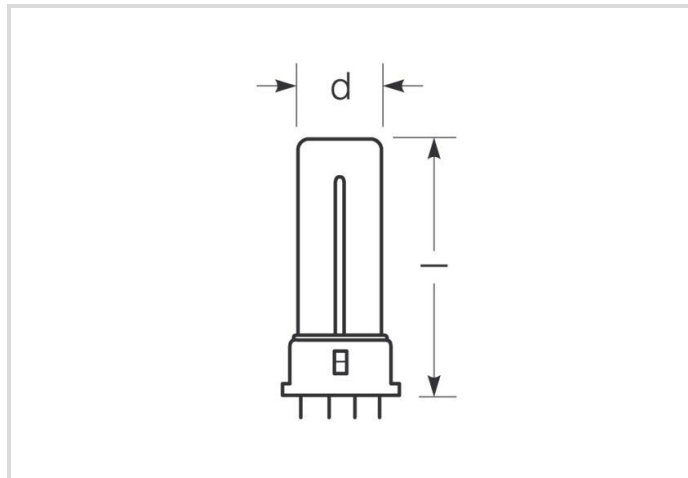

G



900



4000K



12 000h



Dimmable

General Data

Article No.	31310031
Kod	RX-S/E 11W/840/2G7
Product EAN	4008597100314
Box quantity (pcs.)	10
EAN Box	4008597401312
Gross weight of box in kg	0.467
Length of box in m	0.126
Width of box in m	0.086
Height of box in m	0.243
Product weight	30 g
Product status	● Nieaktywne

Electric Parameters

Wattage	12.2 W
Lamp nominal wattage	11 W
Weighted energy consumption in 1000 hours	13 kWh
Lamp voltage	91 V
Mains voltage	230 V

Electric Parameters

dimmable	Tak
----------	-----

Light Application Parameters

Luminous flux	900 lm
Rated lamp luminous flux	900 lm
max. luminous flux at	25 °C
Efficacy	74 lm/W
Light colour	white
Code of light color	840
Colour temperature	4000 K
Color coordinate X	0.380
Color coordinate Y	0.380
Color rendering index	? 80
Mean luminance	2.7
Lumen maintenance at 2000h	0.89
Lumen maintenance at 4000h	0.86
Lumen maintenance at 6000h	0.84
Lumen maintenance at 8000h	0.81
Lumen maintenance at 12000h	0.79
Lumen maintenance at 16000h	0.78
Lumen maintenance at 20000h	0.76

Service Life

Average life	12000 h
Mean service life, HF 3h cycle	20000 h
Lamp survival factor at 2000h	0.99
Lamp survival factor at 4000h	0.99
Lamp survival factor at 6000h	0,94
Lamp survival factor at 8000h	0.99
Lamp survival factor at 12000h	0.95
Lamp survival factor at 16000h	0.81
Lamp survival factor at 20000h	0.50

Specification

Energylabel notice	current label, with EPREL registration
Energylabel (G -> A)	G

Specification

Diameter	27 mm
Total length max.	222 mm
Length	214 mm
Mercury content	1.4 mg
Base	2G7
Colour	White

Information especially for EPREL

Energylabel notice	current label, with EPREL registration
EPREL ID number	541209

Miscellaneous

EU-date of phase-out	25.02.2023
EU Directive	RoHS

Notes


Compact fluorescent lamp, light colour 840, high luminous efficiency, good colour rendering, long life, base 2G7. Controllable by Dim-ECG.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Base




2G7
IEC/EN 60061-1
sheet 7004-102-1

Spectrum


Natural daylight is a mixture of direct sunlight and the light of the sky. Therefore, its spectral composition changes permanently due to the changing time of day. The standardised light classification D65 corresponds to a daylight with a colour temperature of approximately 6500 K.

Every fluorescent lamp type has got an individual spectral power distribution according to its phosphor coating inside the bulb. From this result important properties light colour or colour rendering.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm) per 10nm.

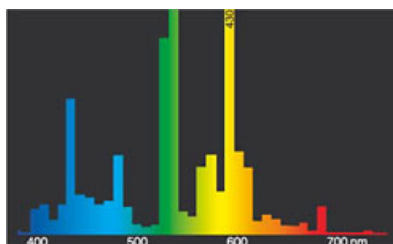

light colour 840 Spectralux® white (21)

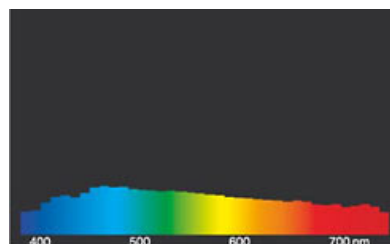

daylight(D 65)

Compact fluorescent lamp Ralux®/E

RX-S/E 11W/840/2G7

Radium

Special features



General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.