
# LED driver DALI

DIMMER DALI 4CH 240W/12-48V IP20

Product Datasheet Date: 30.10.2026



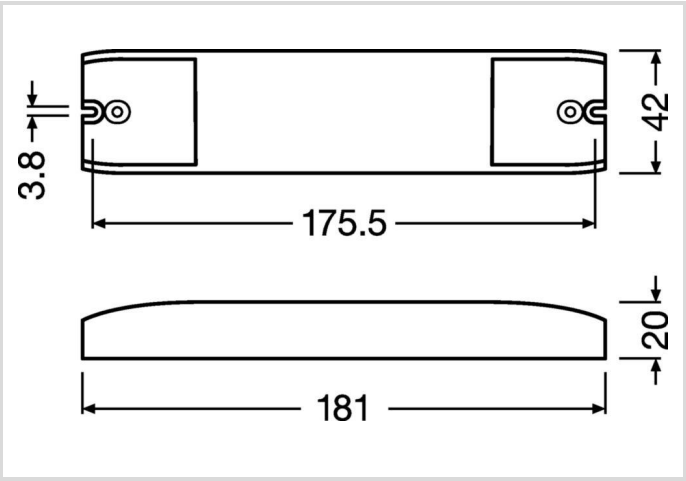


5 YEARS GUARANTEE

## General Data

| | |
|---|---|
| Article No. | OTDA4106 |
| Kod | DIMMER DALI 4CH 240W/12-48V IP20 |
| Product EAN | 4062172166010 |
| Box quantitiy (pcs.) | 20 |
| EAN Box | 4062172166027 |
| Gross weight of box in kg | 2.088 |
| Length of box in m | 0.229 |
| Width of box in m | 0.197 |
| Height of box in m | 0.133 |
| Product weight | 86 g |
| Product status | Nieaktywne |

## Electric Parameters

| | |
|---|---|
| Output power | 0-240.0 W |
| Input voltage DC (range) | 12-48 V |
| Output voltage | 12-48 V |
| Number of Channels | 4 |
| Suitable for DC-voltage (primary side) | Tak |

# LED driver DALI

DIMMER DALI 4CH 240W/12-48V IP20

Radium

## Electric Parameters

| | |
|---|---|
| Dimming with push-button | Nie |
| Dimming interface | DALI |
| DALI Device Type | DALI2 DT6/DT8 |

## Light Application Parameters

| | |
|---|---|
| Dimming range | 0 - 100 % |

## Service Life

| | |
|---|---|
| Service life | 50000 h |
| Tc Temperature max. | 60 °C |
| Guarantee | 5 years |

## Specification

| | |
|---|---|
| Length | 181 mm |
| Height max. | 20 mm |
| Width | 42 mm |
| Model | Static |

## Notes on Operation

| | |
|---|---|
| Degree of protection (IP) | IP20 |
| Protection class | II |
| Type of connection | screw clamp |
| Ambient temperatures | -20…+50 °C |
| Tc Temperature max. | 60 °C |
| max. relative air humidity | 85 % |

## Miscellaneous

| | |
|---|---|
| Similar products | OTDA4101, OTDA4076 |

## Notes

4 channel constant voltage supply 12-48V for up to 240W LED load, dimmable via DALI interface, for indoor applications

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.
The optinal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

# LED driver DALI
DIMMER DALI 4CH 240W/12-48V IP20

Radium

**Special features**



**General notes**

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.
® = Registered trademark
Subject to change without notice. Errors and omissions excepted.

**All technical data without guarantee.**