


# Halogen lamp double based

RJL-TS 400W/42/C/R7S

# Radium

Product Datasheet Date: 15.05.2026

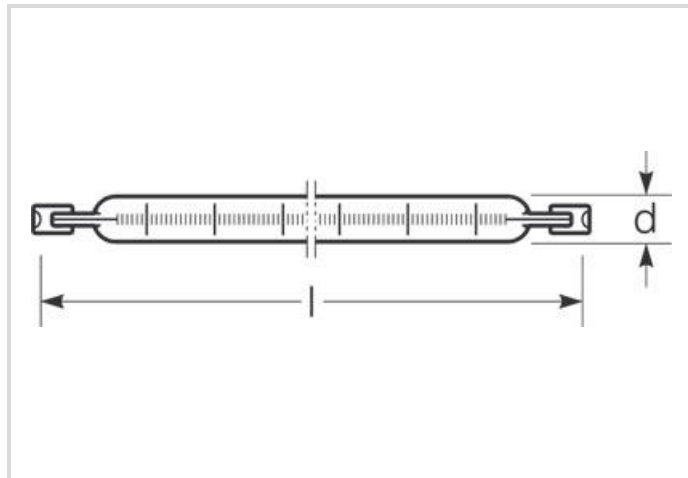

G



9000



2 000h



Dimmable

## General Data

Article No.	22315979
Kod	RJL-TS 400W/42/C/R7S
Product EAN	4008597159794
Box quantity (pcs.)	12
EAN Box	4008597459795
Gross weight of box in kg	0.26
Length of box in m	0.18
Width of box in m	0.12
Height of box in m	0.1
Product weight	11 g
Product status	<span style="color: green;">●</span> Aktywne

## Electric Parameters

Lamp power	400.0 W
Weighted energy consumption in 1000 hours	400 kWh
Power factor	1.00
Lamp voltage	42-42 V
Nominal current	9520 mA

## Electric Parameters

Lamp's nominal current	9.52 A
dimmable	Tak

## Light Application Parameters

Luminous flux	9000 lm
Rated lamp luminous flux	9000 lm
Efficacy	21 lm/W
Colour temperature	3000 K
Color coordinate X	0.446
Color coordinate Y	0.407
Color rendering index	100

## Service Life

Average life	2000 h
--------------	--------

## Specification

Energylabel (G -> A)	G
Diameter	12 mm
Length	[118,0 mm]
Total length max.	118 mm
Contact distance l	114.2 mm
Burning position	any
Mercury content	0.0 mg
Model	Clear
Base	R7s

## Notes on Operation

Burning position	any
------------------	-----

## Information especially for EPREL

EPREL ID number	703294
-----------------	--------

## Miscellaneous

EU-date of phase-out	01.09.2021
EU Directive	SLR = (EU) 2019/2020

# Halogen lamp double based

RJL-TS 400W/42/C/R7S

**Radium**

## Notes

Low voltage halogen lamp clear, tubular shape, 42V, double ended, base R7s, dimmable steplessly, 2000 h mean service life

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

## Base




R7s  
IEC/EN 60061-1  
sheet 7004-92A-4

## Spectrum


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament. The addition of halogens to the filling gas enhance the efficiency and prevents blackening. Further increase in efficiency can be achieved by adding Xenon and/or IRC-coating.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

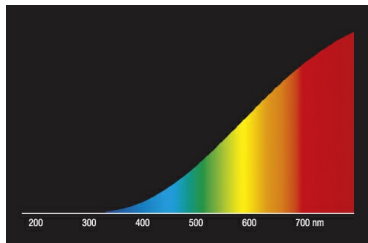


light of incandescent lamps

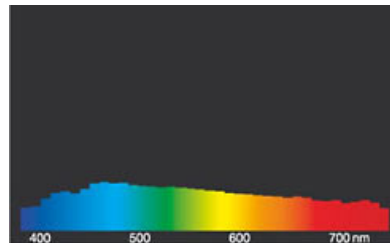

daylight(D 65)

## Special features



## General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefs) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.